



Electric Model: WE50K

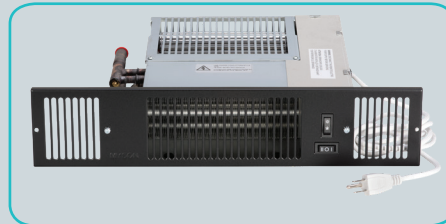

Hydronic Model: W5000, W7000, W9000

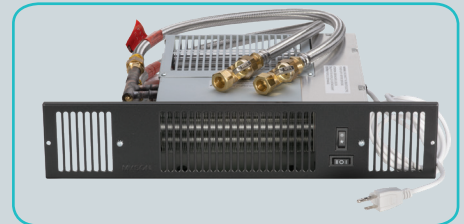

Optional Flexible EZ Hose Kit
(For Hydronic Model)

Whispa III Kick Space Heaters

(Hydronic and Electric Versions)

Whispa III Kickspace Fan Convector are engineered to simply last longer, stay quieter and deliver a heat output you can rely on for accuracy and reliability year after year. It fits easily under a counter, window seat or stairs.

Whispa E50K Kickspace Fan Convector deliver efficient heating from a compact, well-designed stylish electric fan convector. For rapid heat-up, room-to-room comfort, safety and reliability, the Whispa E50K offers unmatched performance for hard-to-heat areas such as kitchens, halls, stairways and bathrooms.

Hydronic Heating Performance Data and Specs (Requires 120 Vac/ 60Hz)

Model	Fan Setting	Flow	Flowrate (GPM)	Heat Output (Btu/h)										Motor Power (W)	Water Content (oz)	Unit Weight (lbs)	Sound Level (dBA@8')
				Entering Water Temperature (°F), Enterin Air Temperature (65°F)													
				110	120	130	140	150	160	170	180	190	200				
M-W5000	Boost	53	3	2040	2516	2997	3480	3967	4457	4949	5443	5939	6437	25	5	9.5	38.1
	Normal	41		1749	2096	2437	2773	3104	3432	3756	4078	4397	4713				25.7
	Boost	53	1	1795	2214	2637	3063	3491	3922	4355	4790	5226	5664				38.1
	Normal	41		1539	1844	2144	2440	2732	3020	3306	3589	3869	4147				25.7
M-W7000	Boost	81	3	2758	3419	4089	4766	5450	6140	6834	7534	8238	8946	40	10	10.3	37.2
	Normal	62		1673	2204	2771	3373	4004	4665	5351	6062	6797	7554				26.4
	Boost	81	1	2427	3009	3598	4194	4796	5403	6014	6630	7249	7872				37.2
	Normal	62		1473	1939	2439	2968	3524	4105	4709	5335	5981	6648				26.4
M-W9000	Boost	124	3	3759	4629	5504	6385	7271	8160	9053	9949	10848	11750	40	11.5	11	49.8
	Normal	82		3266	3916	4556	5185	5807	6422	7031	7634	8233	8827				28.5
	Boost	124	1	3308	4073	4844	5619	6398	7181	7967	8755	9546	10340				49.8
	Normal	82		2874	3446	4009	4563	5110	5652	6187	6718	7245	7767				28.5


Heat outputs tested in accordance with BS 4856 Part 1

Electric Heating Performance Data and Specs (Requires 120 Vac/ 60Hz)

Model	Settings	Watts	Btu/hr	Amps	Equivalent Baseboard	Weight (lbs)	Height (")	Width (")	Depth (")
WE50K	High	2000	6,824	16.7	11.8'	6.9	3 3/8"	15 1/2"	8 7/8"
	Low	1000	3,412	8.3	5.9'				


Available Grill Options:

White, Chrome and Stainless
Black Grill is standard




Delivers up to 6,824 BTU's

Standard Connections:
1/2" Copper tubes for supply and return
Maximum positive operating pressure: 145psi
Maximum operating temperature: 200 °F
Electrical Specifications: 120 Vac/60Hz

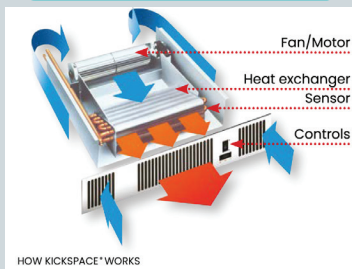


HOW KICKSPACE® WORKS


WH III 5000 Kickspace Heater

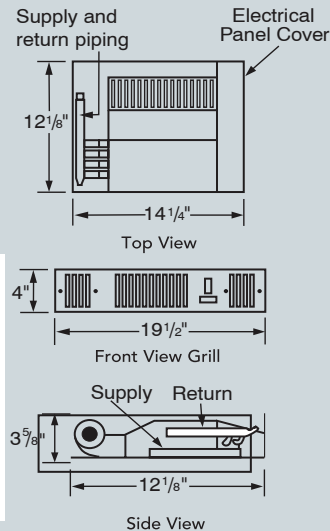

WH III 7000 Kickspace Heater

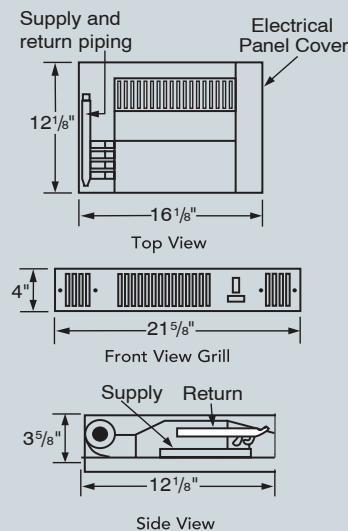

WH III 9000 Kickspace Heater

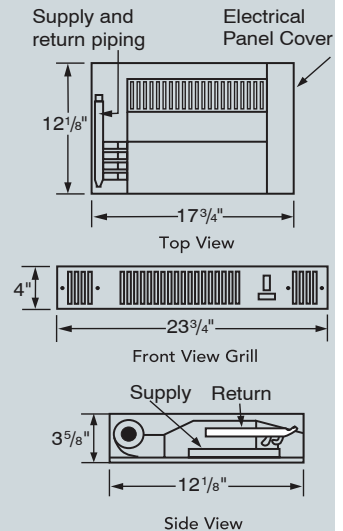

Distributor: QHT Inc. | 3560 Lafayette Rd | Bldg 2, Unit "A" | Portsmouth | NH | 03801

Manufacturer: Purmo Group Ltd | Bulevardi 46| P.O. Box 115 | FI-00121 Helsinki | Finland

Purmo Group / QHT Inc both reserve the right to make changes without notice due to continuing engineering and technological advances

www.purmoUSA.com
800-501-7697

PURMO
BY MYSON

9/9/2020