

# Ecostyle RCV Steel Panel Radiators



## Type 21 (2 Panels, 1 Convector) Type 22 (2 Panels, 2 Convectors)

- Premium Designer Radiators
- White enameled finish for scratch & corrosion resistance
  - Provides both radiant and convective heat
- Well suited for standard efficiency and condensing boilers
  - Easy to sub-zone




## Horizontal Panels Type 21 and Type 22 6 Pipe Connection Panels (1/2")


| Product Code<br>(MODEL/HEIGHT/LENGTH/TYPE)<br>(EXAMPLE=RCV/24/21) | Height<br>(inch) | Length<br>(inch) | Output<br>(BTU/HR)<br>@ 180°F x 68°F** | Output<br>(BTU/HR)<br>@ 140°F x 68°F** | Weight<br>(lbs) | Water<br>Content<br>(gal) |
|-------------------------------------------------------------------|------------------|------------------|----------------------------------------|----------------------------------------|-----------------|---------------------------|
| RCV8 2421                                                         | 8"               | 24"              | 1,346                                  | 781                                    | 17              | .40                       |
| RCV8 3621                                                         |                  | 36"              | 2,022                                  | 1,173                                  | 27              | .60                       |
| RCV8 4821                                                         |                  | 48"              | 2,698                                  | 1,565                                  | 35              | .80                       |
| RCV8 5621                                                         |                  | 56"              | 3,147                                  | 1,825                                  | 41              | .90                       |
| RCV8 7121                                                         |                  | 71"              | 4,046                                  | 2,347                                  | 52              | 1.2                       |
| RCV8 9221                                                         |                  | 92"              | 5,172                                  | 3,000                                  | 67              | 1.5                       |
| RCV8 12021                                                        | 12"              | 120"             | 6,742                                  | 3,910                                  | 94              | 2.0                       |
| RCV12 1622                                                        |                  | 16"              | 1,705                                  | 1,031                                  | 18              | .37                       |
| RCV12 2422                                                        |                  | 24"              | 2,562                                  | 1,548                                  | 27              | .53                       |
| RCV12 3222                                                        |                  | 32"              | 3,414                                  | 2,064                                  | 35              | .71                       |
| RCV12 4022                                                        |                  | 40"              | 4,266                                  | 2,579                                  | 45              | .90                       |
| RCV12 4822                                                        |                  | 48"              | 5,119                                  | 3,094                                  | 54              | 1.08                      |
| RCV12 5622                                                        | 16"              | 56"              | 5,971                                  | 3,610                                  | 62              | 1.27                      |
| RCV12 6422                                                        |                  | 64"              | 6,828                                  | 4,128                                  | 71              | 1.43                      |
| RCV16 1622                                                        |                  | 16"              | 2,167                                  | 1,310                                  | 24              | .48                       |
| RCV16 2422                                                        |                  | 24"              | 3,254                                  | 1,967                                  | 37              | .71                       |
| RCV16 3222                                                        |                  | 32"              | 4,337                                  | 2,622                                  | 49              | .95                       |
| RCV16 4022                                                        |                  | 40"              | 5,421                                  | 3,277                                  | 60              | 1.19                      |
| RCV16 4822                                                        | 20"              | 48"              | 6,504                                  | 3,932                                  | 72              | 1.43                      |
| RCV16 5622                                                        |                  | 56"              | 7,587                                  | 4,586                                  | 84              | 1.66                      |
| RCV16 6422                                                        |                  | 64"              | 8,675                                  | 5,244                                  | 95              | 1.90                      |
| RCV16 7122                                                        |                  | 71"              | 9,758                                  | 5,899                                  | 107             | 2.11                      |
| RCV20 1622                                                        |                  | 16"              | 2,610                                  | 1,578                                  | 30              | .58                       |
| RCV20 2422                                                        |                  | 24"              | 3,916                                  | 2,367                                  | 45              | .87                       |
| RCV20 3222                                                        | 24"              | 32"              | 5,221                                  | 3,156                                  | 61              | 1.14                      |
| RCV20 4022                                                        |                  | 40"              | 6,526                                  | 3,945                                  | 76              | 1.43                      |
| RCV20 4822                                                        |                  | 48"              | 7,831                                  | 4,734                                  | 90              | 1.72                      |
| RCV20 5622                                                        |                  | 56"              | 9,137                                  | 5,523                                  | 105             | 2.01                      |
| RCV206422                                                         |                  | 64"              | 10,442                                 | 6,312                                  | 120             | 2.30                      |
| RCV24 1622                                                        |                  | 16"              | 3,037                                  | 1,836                                  | 37              | .69                       |
| RCV24 2422                                                        | 36"              | 24"              | 4,551                                  | 2,751                                  | 55              | 1.06                      |
| RCV24 3222                                                        |                  | 32"              | 6,069                                  | 3,669                                  | 73              | 1.40                      |
| RCV24 4022                                                        |                  | 40"              | 7,587                                  | 4,586                                  | 90              | 1.74                      |
| RCV24 4822                                                        |                  | 48"              | 9,106                                  | 5,504                                  | 109             | 2.09                      |
| RCV24 5622                                                        |                  | 56"              | 10,624                                 | 6,422                                  | 127             | 2.43                      |
| RCV24 6422                                                        |                  | 64"              | 12,138                                 | 7,337                                  | 144             | 2.80                      |
| RCV24 7122                                                        | 36"              | 71"              | 13,656                                 | 8,255                                  | 162             | 3.14                      |
| RCV36 1622                                                        |                  | 16"              | 4,240                                  | 2,563                                  | 56              | .95                       |
| RCV36 2422                                                        |                  | 24"              | 6,362                                  | 3,846                                  | 83              | 1.43                      |
| RCV36 3222                                                        |                  | 32"              | 8,480                                  | 5,126                                  | 110             | 1.90                      |
| RCV36 4022                                                        |                  | 40"              | 10,602                                 | 6,409                                  | 137             | 2.38                      |
| RCV36 4822                                                        |                  | 48"              | 12,724                                 | 7,691                                  | 165             | 2.85                      |




## Actual Dimensions Type 21 & 22

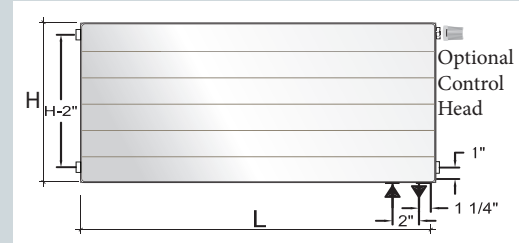

### Type 21

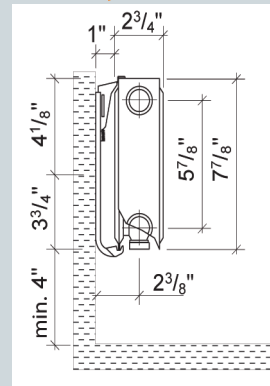

### Type 22

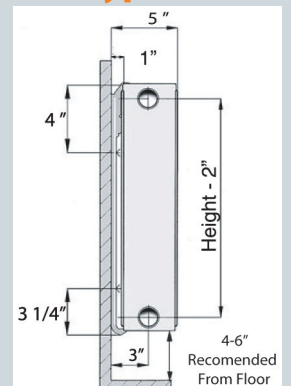

### Type 21



### Type 22



### Standard Features

- Internal thermostatic valve body
- Contoured side panels and top grille
- Adjustable mounting brackets
- Installed: plugs and air vent

\*\*outputs based on water supply temperatures @ 20°Δ T x 68°F room temperature  
All RCV Radiators: Test Pressure: 191 psi - Max Operating Pressure: 147 psi

Now offering an extensive  
range of colors. Please  
contact QHT for details.



www.ecostyle.us

800-501-7697

www.purmoUSA.com

  
**PURMO**

04/06/2023