

ECOSTYLE PCV

Panel Radiators



Premium Designer Radiators

White enameled finish for scratch & corrosion resistance

Provides both radiant and convective heat

Well suited for standard efficiency and condensing boilers

Easy to sub-zone




PCV STEEL PANEL RADIATORS




Actual Dimensions Type 21 & 22



Type 21

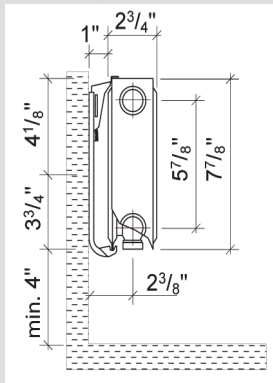

Type 22

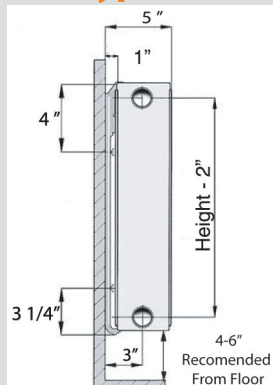

Now offering an extensive range of colors. Please contact us for details.



Horizontal Panels Type 21 & 22 6 Connections- (1/2" BSP Female)

PCV - STEEL PANEL RADIATORS							
Product Code	Height (inch)	Length (inch)	Output (BTU/HR) @ 180°F x 68°F**	Output (BTU/HR) @ 140°F x 68°F**	Weight (lbs)	Water Content (gal)	UPC #
PCV082421	8"	24"	1,346	781	17	.40	6418569229802
PCV083621		36"	2,022	1,173	27	.60	6418569229864
PCV084821		48"	2,698	1,565	35	.80	6418569229925
PCV085621		56"	3,147	1,825	41	.90	6418569229949
PCV087121		71"	4,046	2,347	52	1.2	6418569229987
PCV089221		92"	5,172	3,000	67	1.5	6418569230020
PCV0812021		120"	6,742	3,910	94	2.0	6418569230068
PCV121622	12"	16"	1,705	1,031	18	.37	6418569617272
PCV122422		24"	2,562	1,548	27	.53	6418569617302
PCV123222		32"	3,414	2,064	35	.71	6418569617357
PCV124022		40"	4,266	2,579	45	.90	6418569617395
PCV124822		48"	5,119	3,094	54	1.08	6418569617425
PCV125622		56"	5,971	3,610	62	1.27	6418569617456
PCV126422	16"	64"	6,828	4,128	71	1.43	6418569617470
PCV161622		16"	2,167	1,310	24	.48	6418569617616
PCV162422		24"	3,254	1,967	37	.71	6418569617647
PCV163222		32"	4,337	2,622	49	.95	6418569617685
PCV164022		40"	5,421	3,277	60	1.19	6418569617722
PCV164822		48"	6,504	3,932	72	1.43	6418569617760
PCV165622	20"	56"	7,587	4,586	84	1.66	6418569617784
PCV166422		64"	8,675	5,244	95	1.90	6418569617807
PCV167122		71"	9,758	5,899	107	2.11	6418569617821
PCV201622		16"	2,610	1,578	30	.58	6418569617937
PCV202422		24"	3,916	2,367	45	.87	6418569617968
PCV203222		32"	5,221	3,156	61	1.14	6418569618002
PCV204022	24"	40"	6,526	3,945	76	1.43	6418569618057
PCV204822		48"	7,831	4,734	90	1.72	6418569618095
PCV205622		56"	9,137	5,523	105	2.01	6418569618132
PCV206422		64"	10,442	6,312	120	2.30	6418569618156
PCV241622		16"	3,037	1,836	37	.69	6418569618286
PCV242422		24"	4,551	2,751	55	1.06	6418569618323
PCV243222	36"	32"	6,069	3,669	73	1.40	6418569618361
PCV244022		40"	7,587	4,586	90	1.74	6418569618408
PCV244822		48"	9,106	5,504	109	2.09	6418569618446
PCV245622		56"	10,624	6,422	127	2.43	6418569618484
PCV246422		64"	12,138	7,337	144	2.80	6418569618507
PCV247122		71"	13,656	8,255	162	3.14	6418569618521
PCV361622	36"	16"	4,240	2,563	56	.95	6418569618620
PCV362422		24"	6,362	3,846	83	1.43	6418569618668
PCV363222		32"	8,480	5,126	110	1.90	6418569618705
PCV364022		40"	10,602	6,409	137	2.38	6418569618743
PCV364822		48"	12,724	7,691	165	2.85	6418569618781

**outputs based on water supply temperatures @ 20°Δ T x 68°F room temperature
All PCV Radiators: Test Pressure: 191 psi - Max Operating Pressure: 147 psi

Standard Features

- Internal thermostatic valve Body
- Contoured side panels and top grille
- Adjustable mounting brackets
- Installed, plugs, and air vent

www.purmoUSA.com - www.ecostyle.us - 800-501-7697

