



## Installation Instruction for Free Vented Cover for VSI Models – Non-Ducted

iVector S2 | 2022-04-01

US/CND



**1. Warnings**

- ⚠ This instruction sheet must be read in conjunction with the main installation manual supplied with the appliance. Please consult the main manual for general information and safety rules.
- ⚠ The installation must be performed by a qualified installer.
- ⚠ Exterior Panel Kits are to be used in recessed installations in combination with Built-in Casing Kits.
- ⚠ This Exterior Panel Kit is for recessed units

installed either in a vertical position with non-ducted horizontal outlet or in a horizontal position with non-ducted vertical outlet. For installations in a HORIZONTAL POSITION WITH DUCTED OUTLET, an EXTERIOR PANEL KIT FOR BUILT-IN CEILING INSTALLATION WITH DUCTED OUTLET must be purchased.


- ⚠ Before installing the appliance, check that all necessary water and electrical connections have been set out correctly inside the metal casing.

**2. List of accessories**

AVAILABLE KITS		
Model	Code 2P versions	Code 4P versions
VSI 7	S2_AFVC_VSi7	S2_AFVC_VSi7_4P
VSI 9	S2_AFVC_VSi9	S2_AFVC_VSi9_4P
VSI 11	S2_AFVC_VSi11	S2_AFVC_VSi11_4P
VSI 13	S2_AFVC_VSi13	S2_AFVC_VSi13_4P
VSI 15	S2_AFVC_VSi15	S2_AFVC_VSi15_4P

**3. Installation**

- Fix the 3 insulating panels supplied with the kit to the upper part of the appliance.

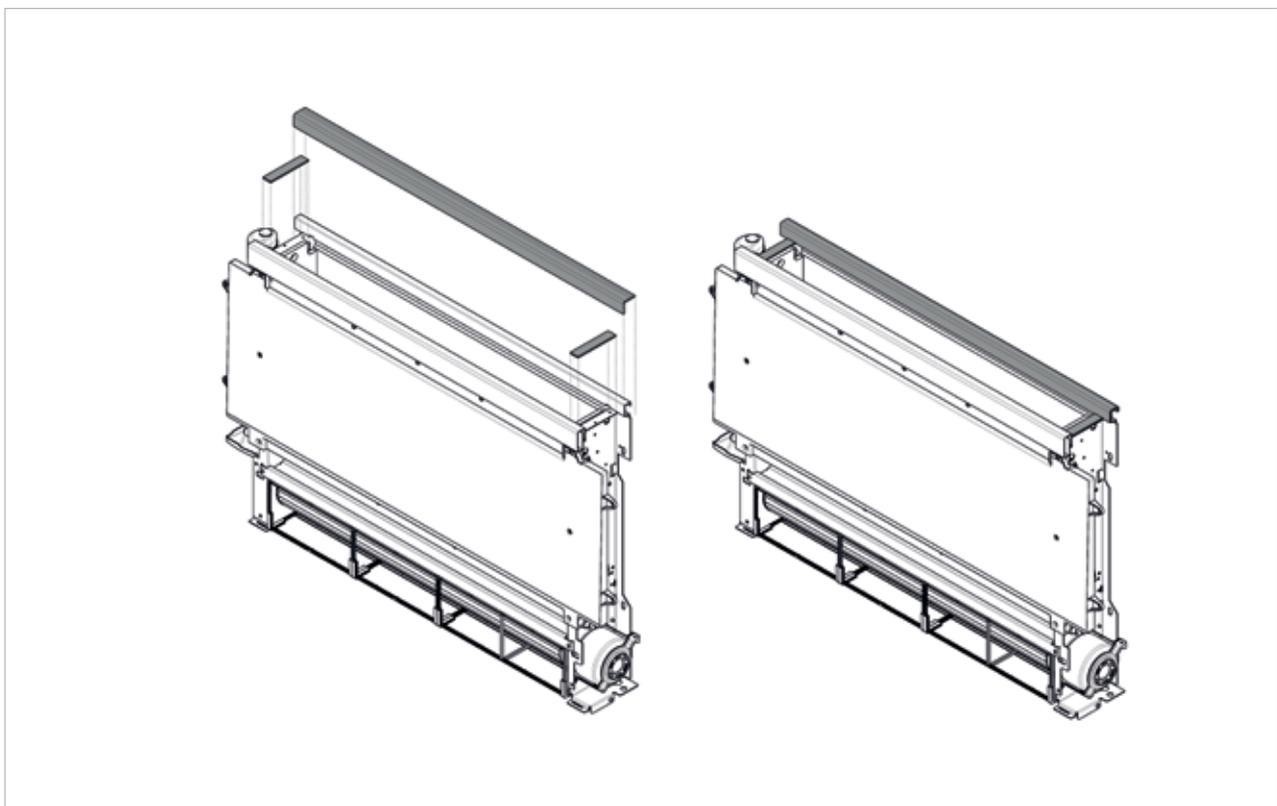


- Make 4 holes Ø 8mm (nominal  $\frac{5}{16}$  inch) in line with the holes, B, and insert the toggle bolts (2 for each bracket) into the wall.
- Install the 2 supporting brackets supplied with the appliance using the screws and washers supplied with the toggle bolts.
- Check that the brackets are properly secured by manually moving them from left to right, up and down.

**A** A hole




For the horizontal ceiling version, secure the appliance through the 2 holes, A, using the screws and washers supplied with the toggle bolts. Before assembling the kit, the GRILLE, FILTER retaining crossbar and FRONT panel must be removed by unscrewing the 6 fixing screws in the lower part of the FRONT PANEL.

**B** B hole

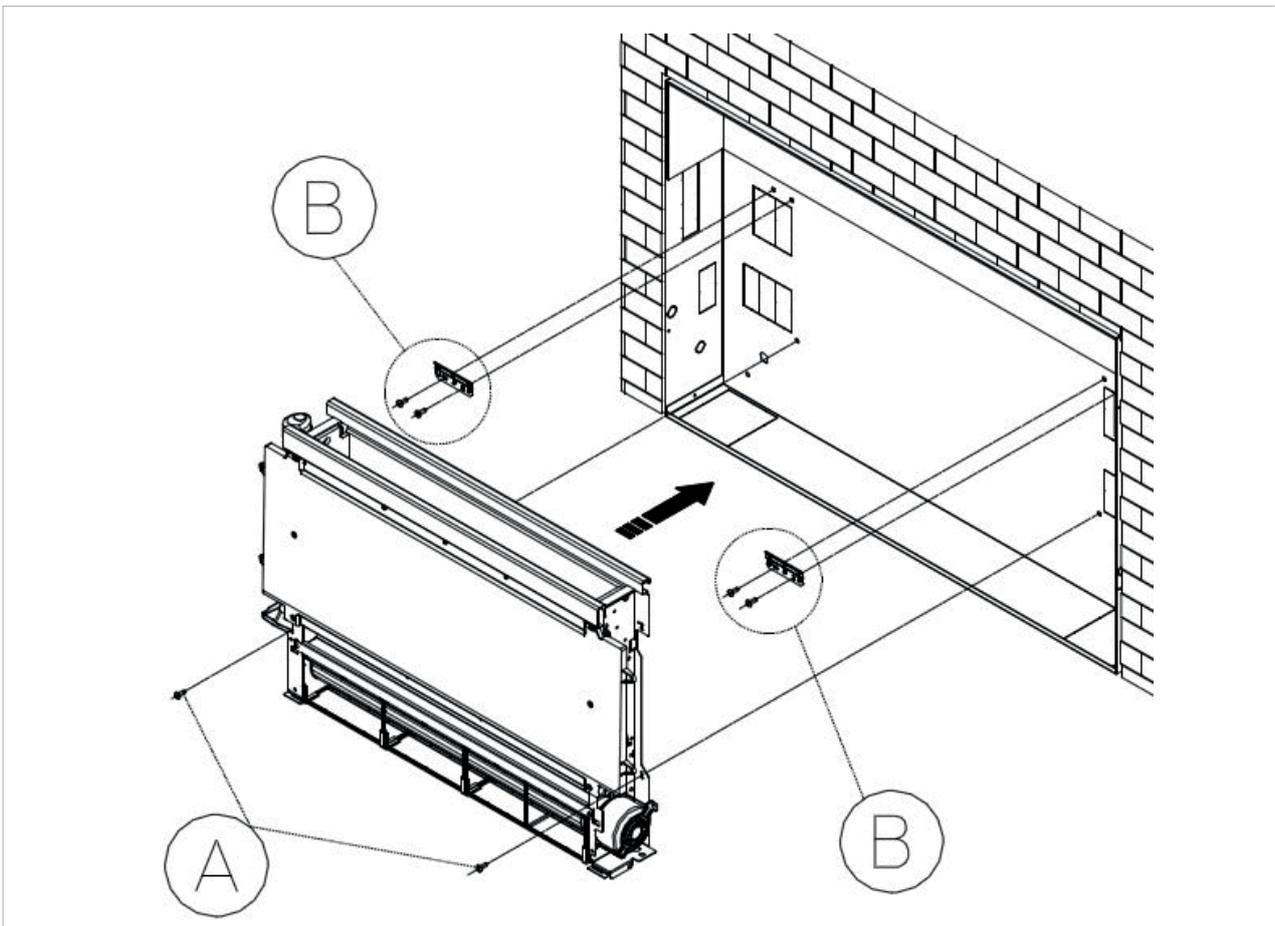


#### 4. Installation of exterior frame

- Position the exterior frame so that it is pushed against the wall.
- Secure it to the sides of the built-in casing using the 4 screws supplied with the kit.

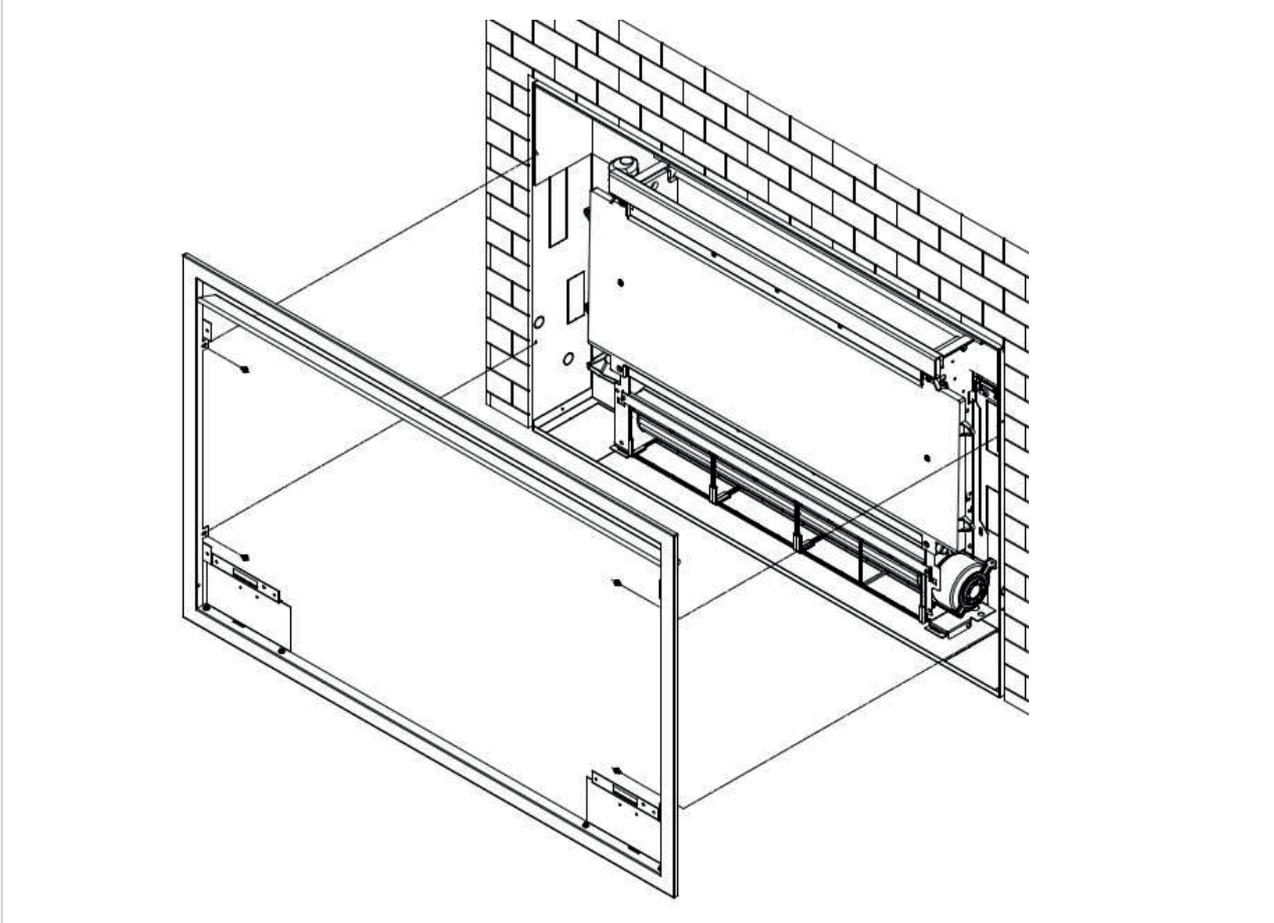

### 5. Installation of exterior front panel and filter retaining crossbar

- Hook the upper part of the front panel onto the tabs on the frame.
- Fit the filter retaining cross-bar removed from the lower part of the panel.
- Secure the front panel, re-screwing the 6 screws previously removed from the lower part of the panel.

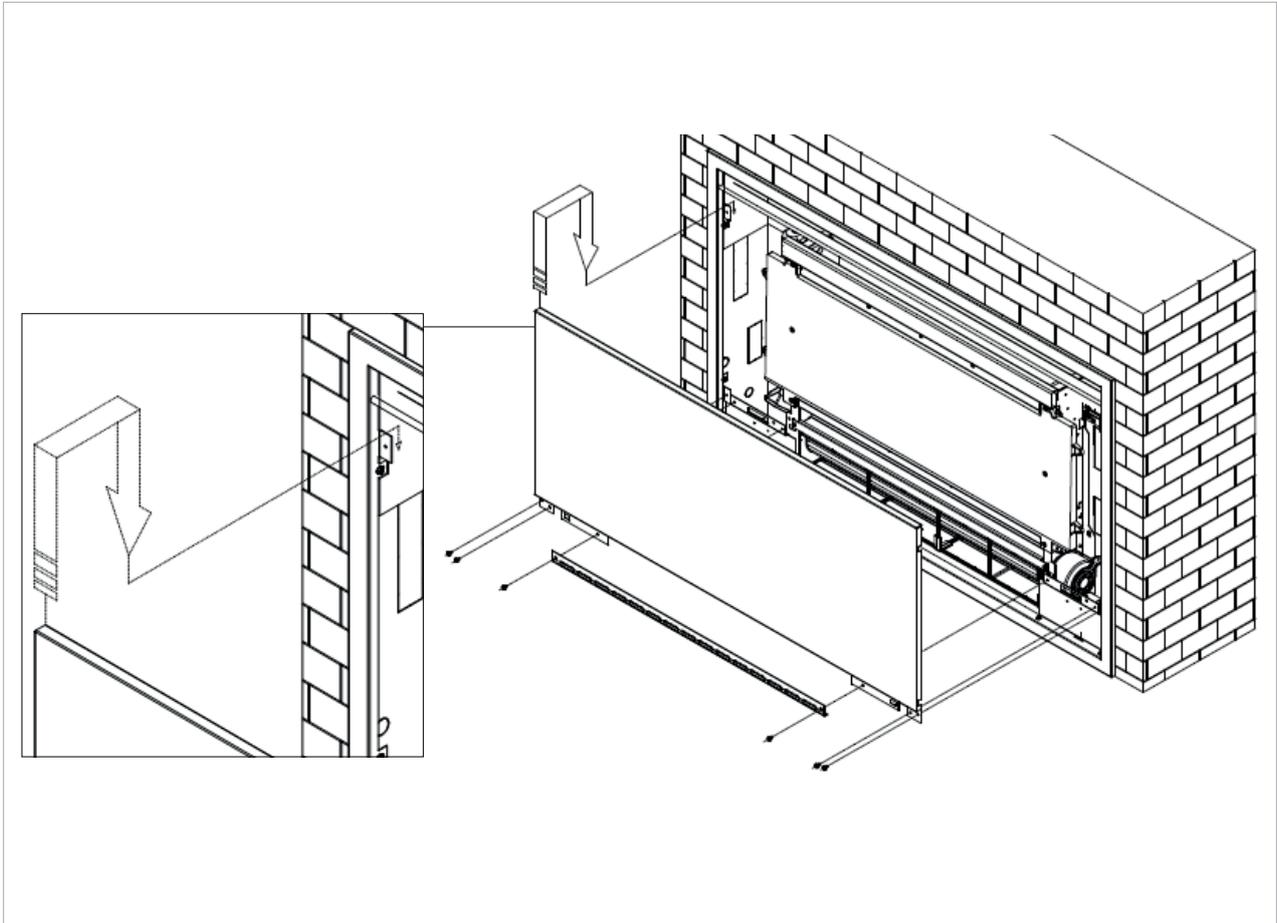


## 6. Installation of lower grille




For horizontal ceiling installations, install the front grille safety supports following the instructions in the relevant paragraph of the manual supplied with the appliance.

- Insert the two tabs on the grille into the designated slots on the lower part of the frame.
- Close the grille by turning it until the upper lamella are locked.

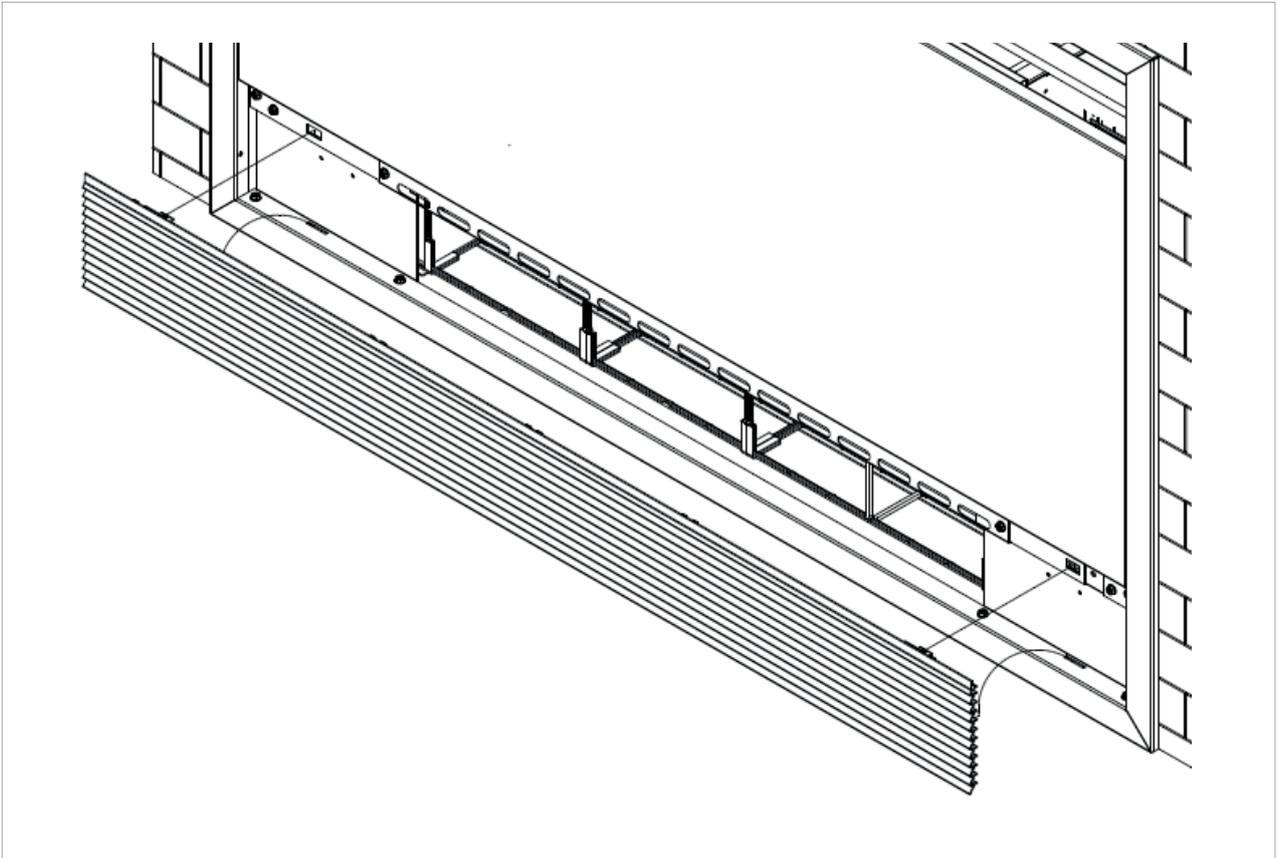


## 7. Cleaning the filter

- Remove the front grille by lifting it slightly.

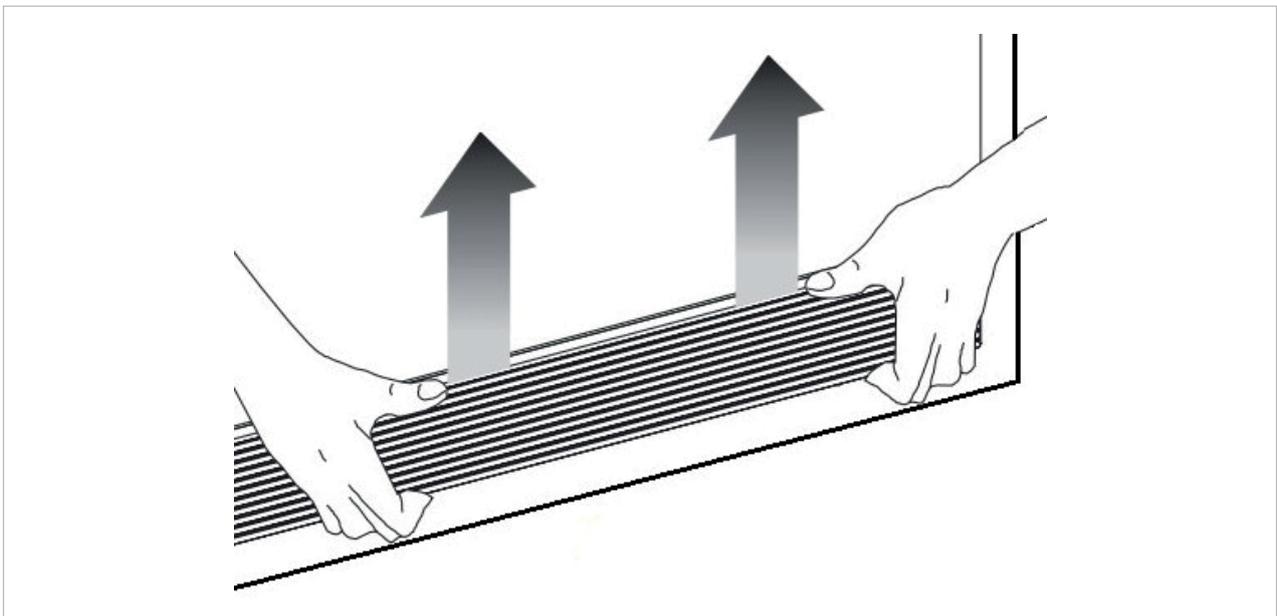


- Turn it until it completely lifts out of its housing.

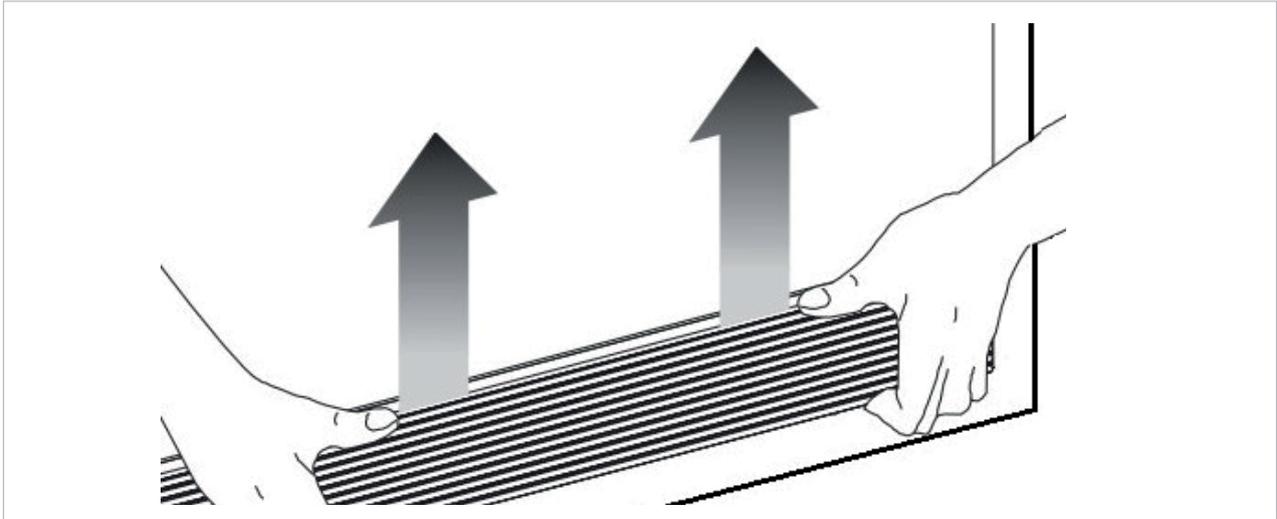


- Remove the filter retaining crossbar by unscrewing the 2 screws.

- Pull the filters out horizontally and carry out the cleaning operations in accordance with the maintenance instructions supplied with the appliance.

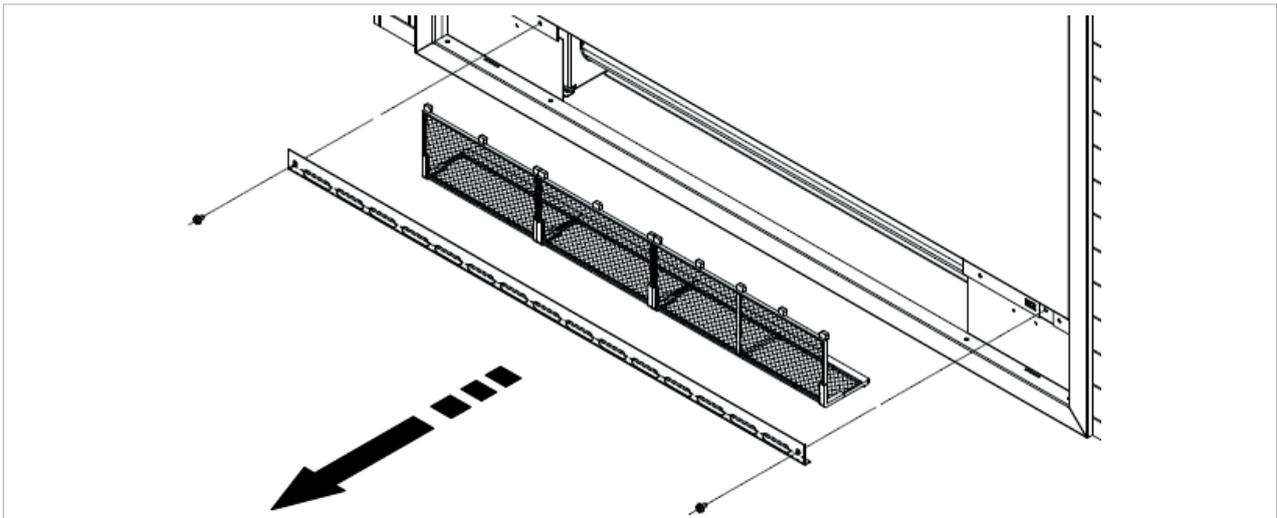

- Replace the filters, taking particular care to insert the lower edge (A) into its housing (B).

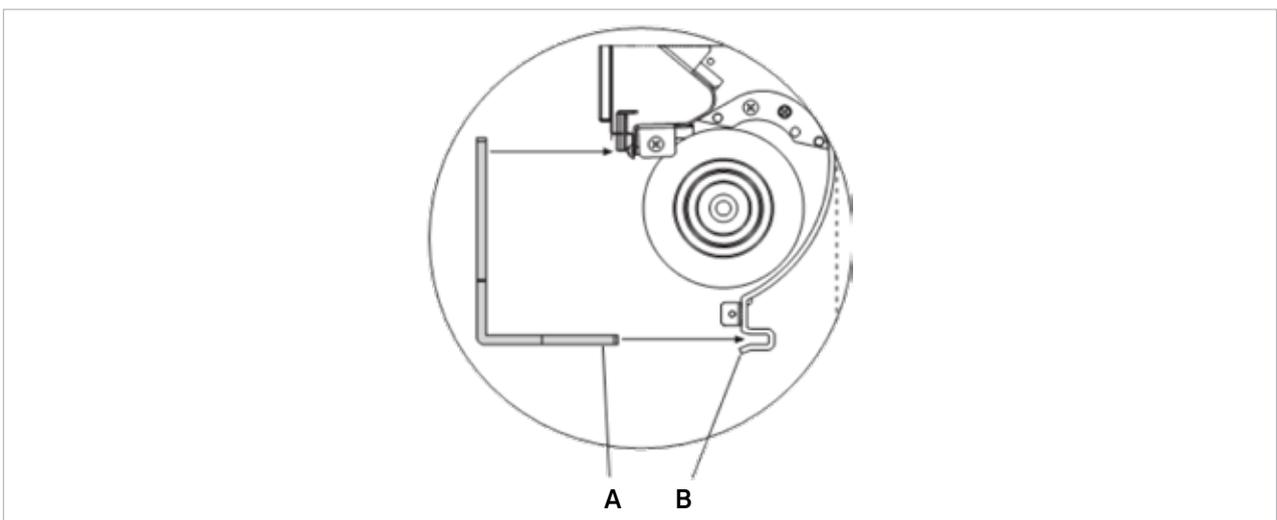



00000000000007\_PG\_MANUAL-Exterior-Panel-Kit-for-Built-in-Wall-Mounted-Installations-Vector-S2\_2022-04-01\_01\_GB\_NA\_000000\_01

A PURMO GROUP BRAND   
Bulevardi 46  
P.O. Box 115  
FI-00121 Helsinki Finland  
[www.purmogroup.com](http://www.purmogroup.com)

**Myson**  
45 Krupp Drive  
P.O. Box 1460 Williston,  
Vermont 05495  
USA  
[www.mysoncomfort.com](http://www.mysoncomfort.com)

Every care has been taken in the creation of this document. No part of this document may be reproduced without the express written consent of Purmo Group. Purmo Group accepts no responsibility for any inaccuracies or consequences arising from the use or misuse of the information contained herein.

